

Inventory

- Filter
- Sort
- Edit
- Delete
- Add

DMT 2

- Normal 10rt 3.5in x 4.5in
- Pin Insulator - 6" x 6"
- Primary 186" 240'
- Pin Insulator - 6" x 6"
- Pin Insulator - 6" x 6"
- Pin Insulator - 6" x 6"
- Normal 10rt 3.5in x 4.5in
- Anchor 30.00 ft at 103.0'
- 7/16" Guy
- Normal 8rt 3.5in x 4.5in
- Deadend 4
- Deadend 4
- Spar/Head Termination
- Spar/Head Termination
- CATV
- Wood - GO 95 Grade A - Light Loading - At Replacement
- Strength/Inspection Information
- Telco attached to Stub Pole / DW
- Clearance Analysis


Capacity



29.3% of Allowed

Guy's are adequate

3D View | Measure | Charts

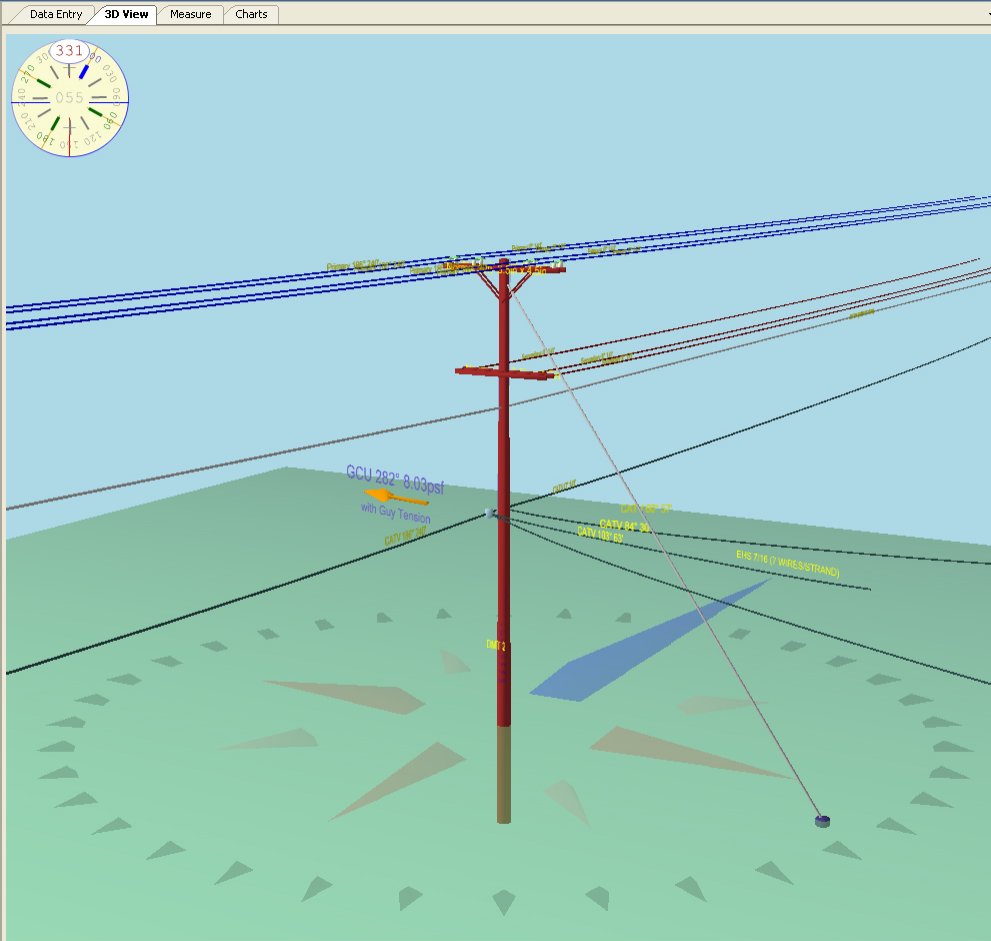

GCU 282' 0.03psf

GUY TENSION


GUY W 30T

CATV W 24

CATV HEAD


80 106 / WIRESTRAND

Top View

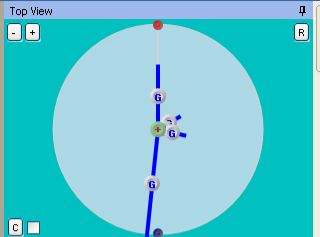

Schematic

Above GL Portion Only

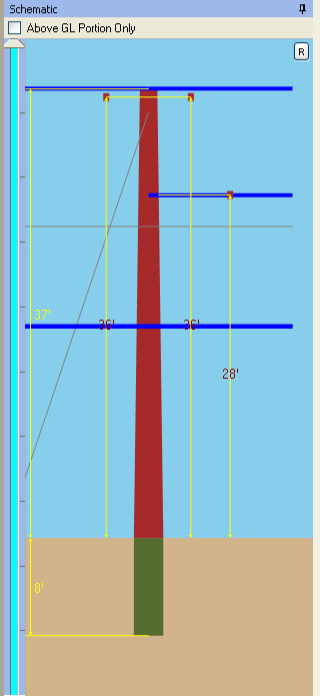

10'

36'

36'

28'